


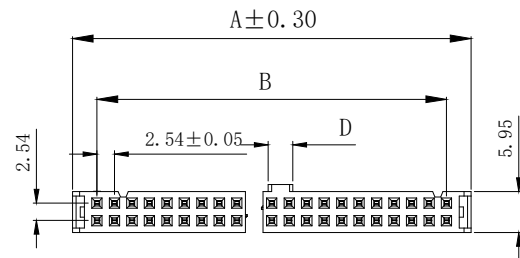

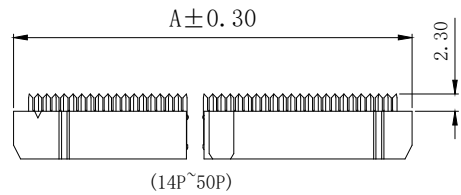




版次	变更内容	审核	日期

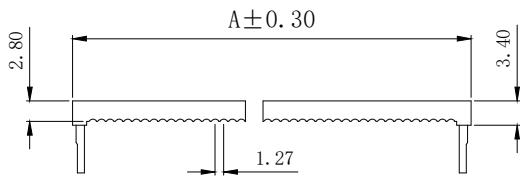

材料(Material):  
 绝缘(Insulator): P.B.T +30%G.F (UL94V-0)  
 接触(Contact): Brass or Phosphor Bronze  
 接触镀层(Contact plated): Gold over Nickel or Tin





技术参数(Specifications):  
 额定电流(Current rating): 1 A  
 额定电压(Withstanding Voltage): 500V AC/minute  
 接触电阻(Contact resistance): ≤20mΩ/contact  
 绝缘电阻(Insulation resistance): ≥1000MΩ at 500V  
 工作温度(Operating temperatures): -40° C to +105° C

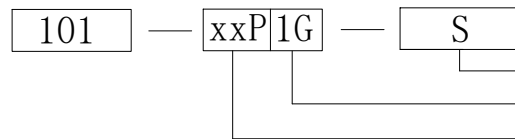

颜色和触点: 缺省--黑色双触, S--黑色单触, 4--灰色单触  
 端子镀层: 缺省--接触点镀金, 1G--端子整体镀金  
 芯数: 06P--64P

DIMENSION				
CONTACTS	A	B	C	D
06P	12.18	5.08	13.60	1.90
08P	14.72	7.62	13.60	1.90
10P	17.26	10.16	13.60	3.70
12P	19.80	12.70	13.60	3.70
14P	22.34	15.24	13.60	3.70
16P	24.88	17.78	13.60	3.70
20P	29.96	22.86	13.60	3.70
24P	35.04	27.94	13.60	3.70
26P	37.58	30.48	13.60	3.70
30P	42.66	35.56	13.60	3.70
34P	47.74	40.64	13.60	3.70
40P	55.36	48.26	13.60	3.70
44P	60.64	53.34	13.60	3.70
50P	68.06	60.96	13.60	3.70
60P	80.90	73.66	13.60	3.70
64P	86.10	78.74	13.60	3.70

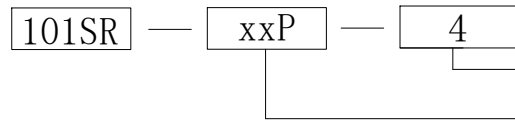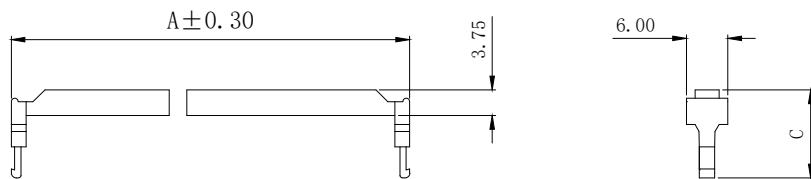

颜色: 缺省--黑色, 4--灰色  
 芯数: 06P--64P

公差:	版次:	A	上海宗进电子科技有限公司		
. X ±0.35	比例:		Shanghai Zong Jin Electron Technology Co.LTD		
. XX ±0.25	单位:	mm	型号: 101 SERIES	绘图:	签名
. XXX	页码:	1/1	描述: 压线母头	确认:	日期
LNGLB ±2°	图号:		审核:		