
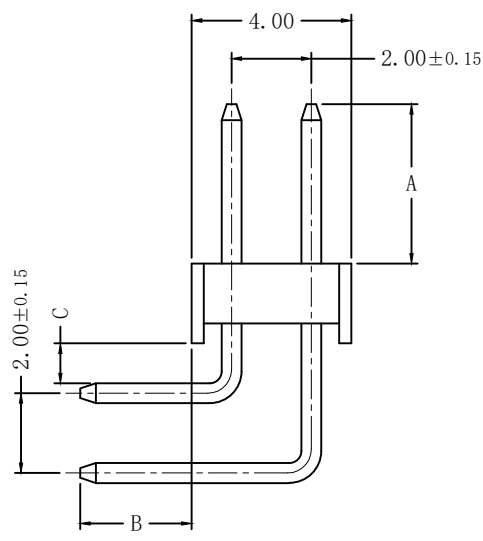


版次	变更内容	审核	日期

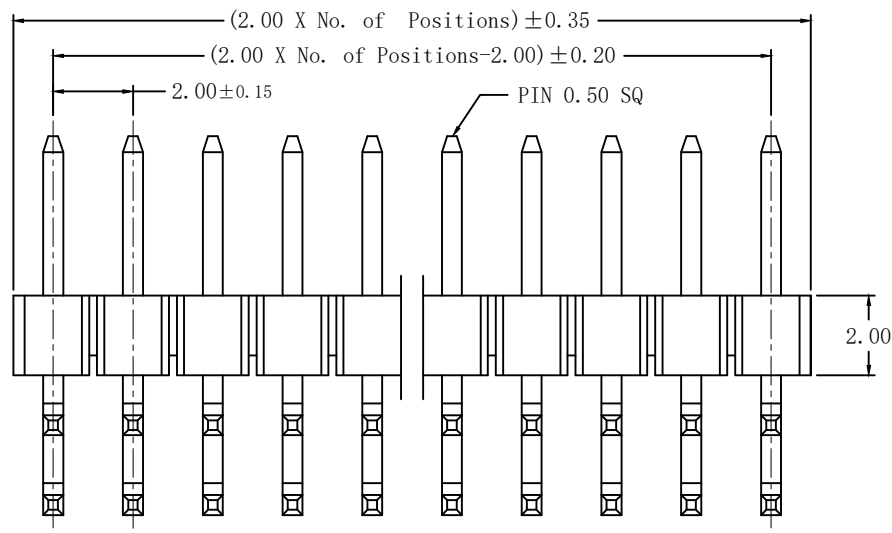

201-2R-2\*xxP G-A/B/C

单排芯数 01~40P


电镀 G: 镀金Gold Flash  
1G: 镀金1u"  
3G: 镀金3u"  
(镀金可订制)

内距 (可订制)

针长 (可订制)

针长 (可订制)

弯曲度: 2\*02P ~ 2\*20P 0.30 MAX.  
2\*21P ~ 2\*30P 0.40 MAX.  
2\*31P ~ 2\*40P 0.50 MAX.

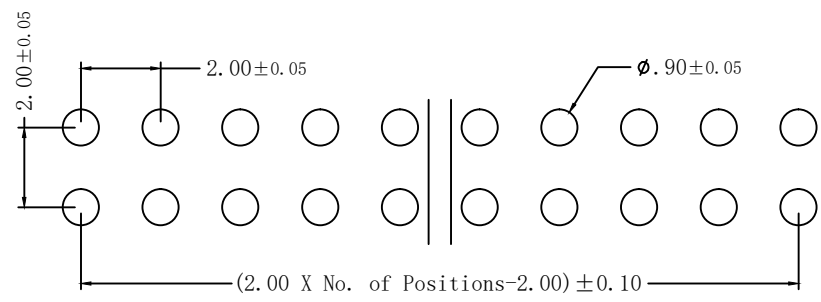

Recommended PCB Layout

技术参数: SPECIFICATIONS

额定电流 (Current Rating): 2A

绝缘电阻 (Insulation Resistance): 1000MΩ Min.

额定电压 (Dielectric Withstanding Voltage): AC 500V

工作温度 (Operating Temperature): -40°C ~ +105°C

最大加工温度 (Max Processing Temp): (230°C for 30~60 seconds)  
(260°C for 10 seconds)

接触材料 (Contact Material): 黄铜 (Brass)

塑胶材料 (Insulator Material): 尼龙 (Nylon)-9T, UL 94V-0; 颜色: 黑色

接触电镀 (Contact Plating): 镀金 (Gold plated)  
(电镀规格可根据客户要求来定制)  
Optional plating on request.

公差:	版次:	A	上海宗进电子科技有限公司 Shanghai Zong Jin Electron Technology Co.LTD			
. X ±0.35 . XX ±0.25 . XXX ±2° LNLGB	比例:		型号: 201-2R-2*xxPG-A/B/C	绘图:	签名	日期
	单位:	mm		描述: 2.0双排弯脚排针	确认:	
	页码:	1/1	图号:		审核:	