

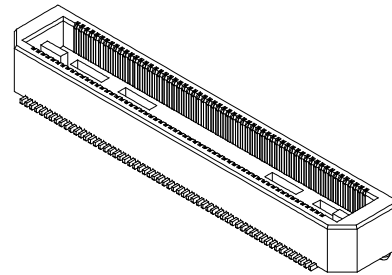
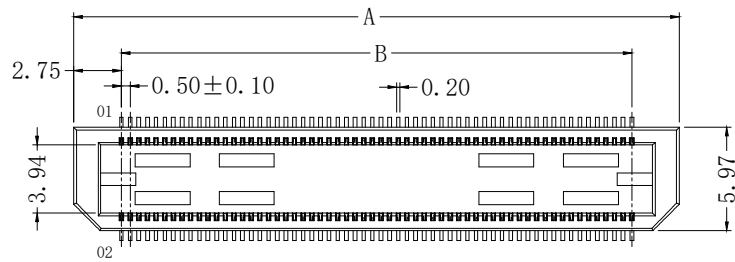


| 版次 | 变更内容 | 审核 | 日期 |
|----|------|----|----|
| | | | |

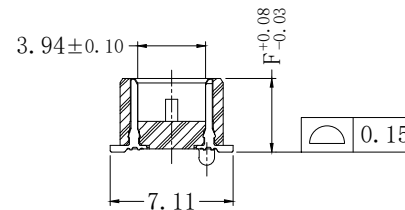

产品特性:


1. 绝缘体: LCP, UL 94V-0, 颜色: 黑色
2. 端子: 磷青铜
3. 电镀: 接触区镀金
4. 额定电流: 2 A (2个引脚供电)
5. 工作温度: -55° C TO +125° C
6. 额定电压: 175V AC

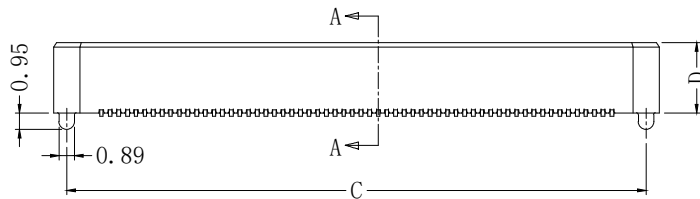

| D | F |
|------|------|
| 4.06 | 4.27 |
| 7.06 | 7.27 |

| | | |
|-------|-------|------|
| 合 高 | | |
| BSH05 | BTH05 | |
| | 4.27 | 7.27 |
| 3.25 | 5.00 | 8.00 |

SECTION A-A

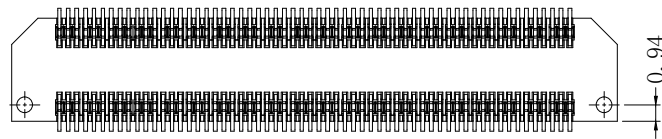

BTH05-SM-2*xxP X-X

单排芯数:

塑胶高度:

4.06: 4.06mm


7.06: 7.06mm

接触电镀:

10G: GOLD 10u"

30G: GOLD 30u"

| POS | A | B | C |
|-------|-------|-------|-------|
| 2*30 | 20.00 | 14.50 | 18.48 |
| 2*50 | 30.00 | 24.50 | 28.48 |
| 2*60 | 35.00 | 29.50 | 33.48 |
| 2*90 | 50.00 | 44.50 | 48.48 |
| 2*120 | 65.00 | 59.50 | 63.48 |
| 2*150 | 80.00 | 74.50 | 78.48 |

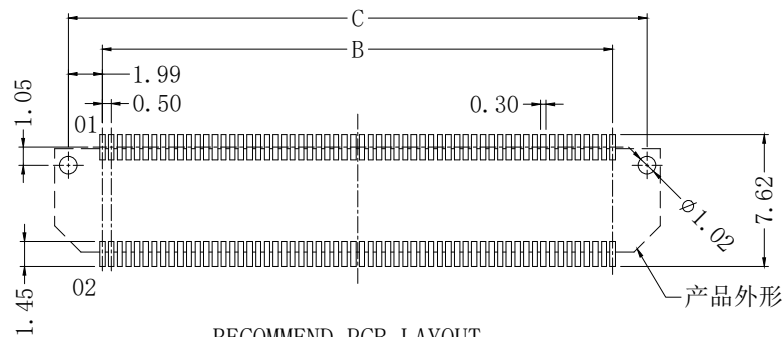

RECOMMEND PCB LAYOUT

TOLERANCE: ±0.05

| | | | | | | | |
|------------|-----|-----|--|-----------------|-----|----|----|
| 公差: | 版次: | A | 上海宗进电子科技有限公司 | | | | |
| | 比例: | | Shanghai Zong Jin Electron Technology Co.LTD | | | | |
| . X ±0.35 | 单位: | mm | 型号: | BTH05-SM-2*xxPX | 绘图: | 签名 | 日期 |
| . XX ±0.25 | 页码: | 1/1 | 描述: | 0.5mm BTB 插座 | 确认: | | |
| . XXX ±2° | 图号: | | | | 审核: | | |
| LNLB | | | | | | | |