
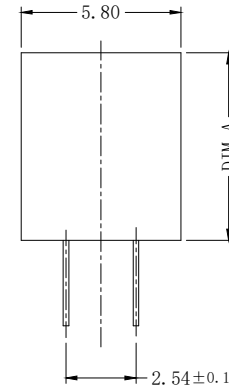


版次	变更内容	审核	日期

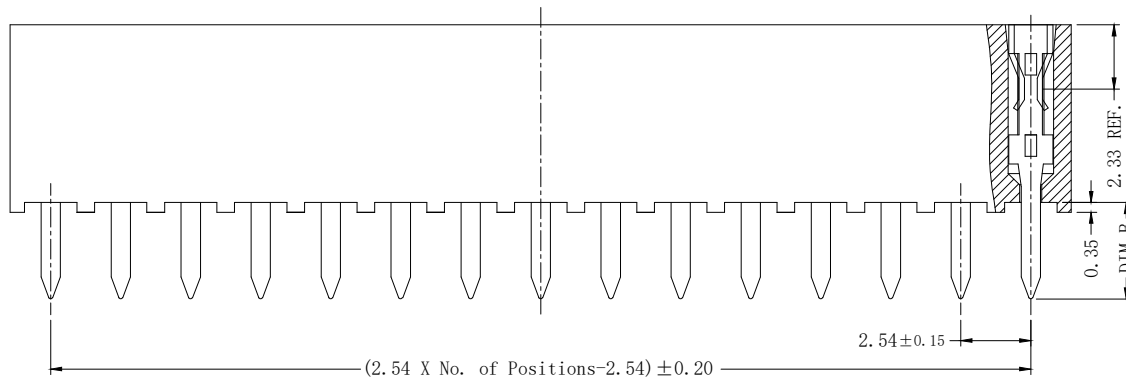

203S-4C-2*xxP X-A /B

单排芯数: 01~40


接触电镀:

- G: 镀金Gold Flash
- 1G: 镀金1u"
- 3G: 镀金3u"
- 10G: 镀金10u"

脚长: 3.5: 3.50mm

塑胶高度: 6.8: 6.80mm

弯曲度: 2*02P ~ 2*20P 0.30 MAX.
 2*21P ~ 2*30P 0.40 MAX.
 2*31P ~ 2*40P 0.50 MAX.

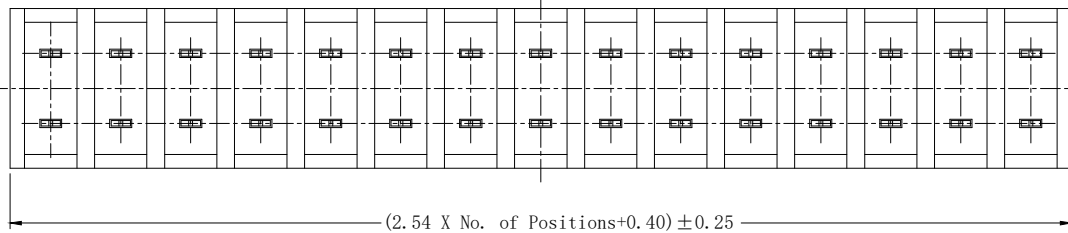

技术参数: SPECIFICATIONS

额定电流 (Current Rating): 3A

绝缘电阻 (Insulation Resistance): 1000MΩ Min.

接触电阻 (Contact Resistance): 20mΩ Max.

额定电压 (Dielectric Withstanding Voltage): AC 500V


工作温度 (Operating Temperature): -40°C ~ +105°C

最大加工温度 (Max Processing Temp): (230°C for 30~60 seconds)
(260°C for 10 seconds)

接触材料 (Contact Material): 磷青铜(Phosphor Bronze), THICKNESS 0.20mm

塑胶材料 (Insulator Material): 尼龙(Nylon)-9T, UL 94V-0, 颜色: 黑色

接触电镀 (Contact Plating): 镀金 (Gold plated)

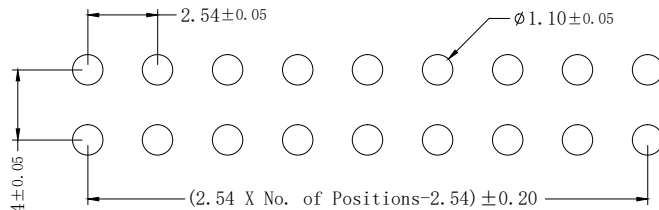

Recommended PCB Layout

公差: . X ±0.35 . XX ±0.25 . XXX LNLB ±2°	版次:	A	上海宗进电子科技有限公司 Shanghai Zong Jin Electron Technology Co.LTD		
	比例:		型号:	203S-4C-2*xxPX-A/B	签名
	单位:	mm	描述:	2.54双排四面包端直脚排母	
	页码:	1/1	图号:		日期
				绘图:	
				确认:	
				审核:	