
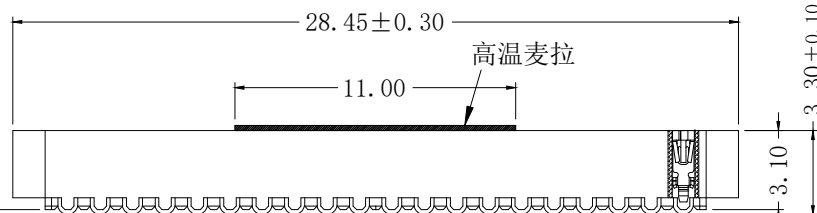


REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED




Material:  
 Contact Material: Phosphor Bronze  
 Contact plating: Selective 5u" Gold  
 Insulator Material: Black Polyester UL94V-0  
 Standard: LCP +30%G.F

Electrical:  
 Current rating: 1.0Amps/contact max.  
 Contact resistance:  $\leq 20m\Omega$ /contact  
 Insulation resistance:  $\geq 1000M\Omega$  at DC 100V  
 Withstanding Voltage: 500V AC/minute

Mechanical:  
 Mechanical life cycle: 200 cycle  
 Operating temperatures: Gold Plated:  $-55^{\circ}C$  to  $+105^{\circ}C$   
 Tin plated:  $-40^{\circ}C$  to  $+105^{\circ}C$   
 Soldering temperature:  $+260^{\circ}C$ , 10s max.

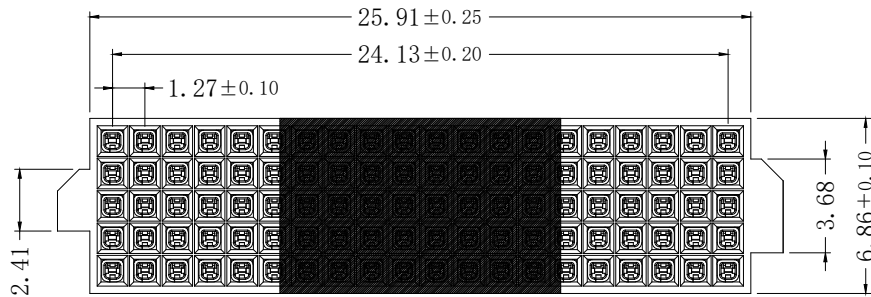

0.12

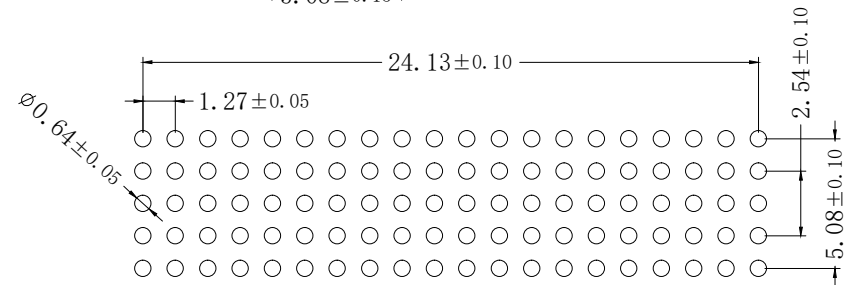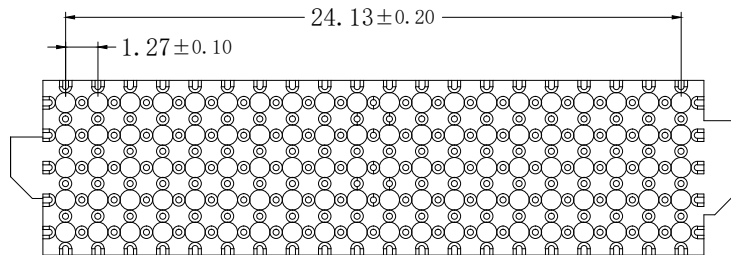

PCB LAYOUT

	DIM. CLASS	TOLERANCE	APPROVALS	DATE	TITLE		上海宗进电子科技有限公司			
	<input checked="" type="checkbox"/> (CRITICAL) <input checked="" type="checkbox"/> (MAJOR) <input type="checkbox"/> (MINOR) <input type="checkbox"/> (REF.)	X. X.X ±0.35 X.XX ±0.25 X.XXX	APPROVED DWG TYPE	赵强 SALE DWG	2023.09.24 SLOT	PH1.27 H3.1 W6.86 5*20P母座		深圳朗城科技有限公司		
	ANGULAR ±2' UNLESS OTHERWISE SPECIFIED	DWG TYPE	PROJECT CODE		UNIT mm SCALE NA	SIZE A3 SHEET 1 OF 1	PART No. 209-5*20F10G-J	DWG No. S209-5*20F10G-J		
	REV. A	深圳朗城科技有限公司								