


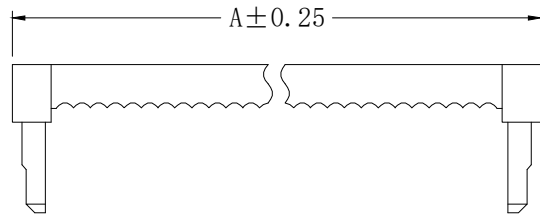
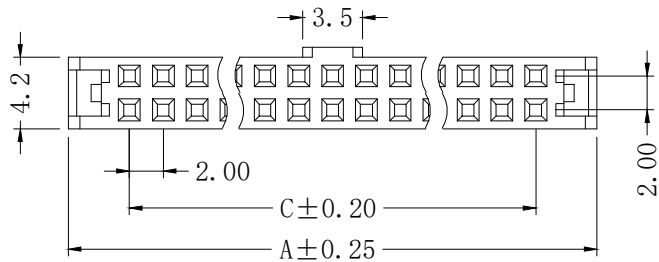


版次	变更内容	审核	日期



技术参数: SPECIFICATIONS

额定电流 (Current Rating): 1A
 绝缘电阻 (Insulation Resistance): 500MΩ Min. at 500V
 接触电阻 (Contact Resistance): 20mΩ Max.
 额定电压 (Dielectric Withstanding Voltage): AC 500V
 工作温度 (Operating Temperature): -40°C ~ +105°C
 接触材料 (Contact Material): 黄铜 (Brass)
 塑胶材料 (Insulator Material): PBT, UL 94V-0
 接触电镀 (Contact Plating): 镀金 Gold Flash

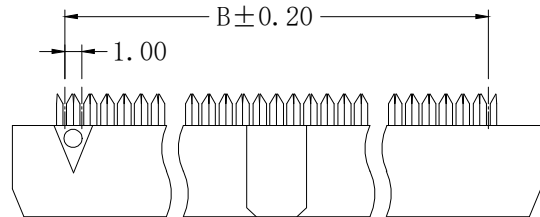

Pos.	Dim A	Dim B	Dim C
6	11.20	5.00	4.00
8	13.20	7.00	6.00
10	15.20	9.00	8.00
12	17.20	11.00	10.00
14	19.20	13.00	12.00
16	21.20	15.00	14.00
18	23.20	17.00	16.00
20	25.20	19.00	18.00
22	27.20	21.00	20.00
24	29.20	23.00	22.00
26	31.20	25.00	24.00
28	33.20	27.00	26.00
30	35.20	29.00	28.00
32	37.00	31.00	30.00

Pos.	Dim A	Dim B	Dim C
34	39.20	33.00	32.00
36	41.20	35.00	34.00
38	43.20	37.00	36.00
40	45.20	39.00	38.00
44	49.20	43.00	42.00
48	53.20	47.00	46.00
50	55.20	49.00	48.00
54	59.20	53.00	52.00
56	61.20	55.00	54.00
60	65.20	59.00	58.00
62	67.20	61.00	60.00
64	69.20	63.00	62.00
68	73.20	67.00	66.00
80	85.20	79.00	78.00

公差:	版次:	A	上海宗进电子科技有限公司				
	比例:		Shanghai Zong Jin Electron Technology Co.LTD				
. X ±0.35	单位:	mm	型号:	101-2-xxP	绘图:	签名	日期
. XX ±0.25	页码:	1/1	描述:	2.0压线母头	确认:		
. XXX ±2°			图号:		审核:		
LNLGB							