

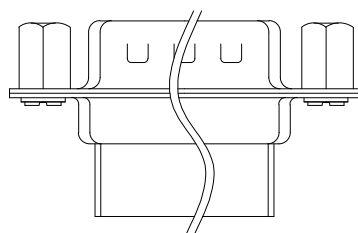


版次	变更内容	审核	日期

9, 15, 25 & 37 Positions

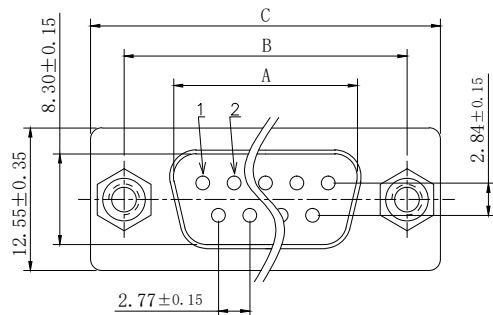

材料 (MATERIALS):

绝缘体 (Insulator): PBT+G.F, UL94V-0

外壳 (Shell): 铁材 or 不锈钢 (Steel or Stainless steel)

电气说明 (ELECTRICAL SPECIFICATION):

额定电流 (Current Rating): 5 Amperes

额定电压 (Dielectric Withstanding Voltage): AC 1000/60ses.r.m.s.

绝缘电阻 (Insulation Resistance): 1000 MΩ Min. at DC 500V

接触电阻 (Contact Resistance): 25 mΩ Max.

使用温度 (Operating Temperature): -20°C~+105°C

DCH-xx M-A A-3-B

芯数
09, 15, 25, 37, 50


极性
M: 公(针)

螺柱长度
A: 光孔
C: 前: 4.8mm/后: 4.0mm
D: 5.8mm




外壳材质
B: 不锈钢
缺省: 铁

塑胶颜色
3: 黑色

螺柱位置
A: 无
B: 前固定
E: 后固定

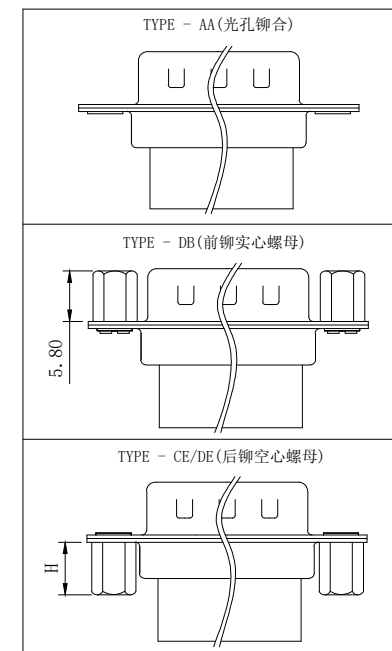

50 Positions

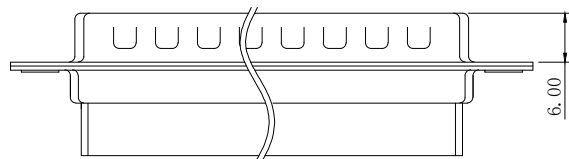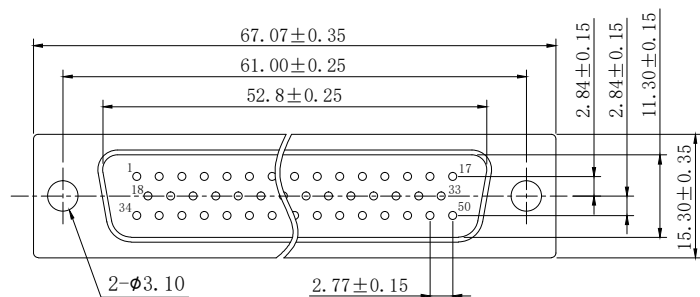

NUMBER OF CONTACTS	A	B	C
	±0.25	±0.25	±0.35
9	16.90	25.00	30.80
15	25.25	33.30	39.20
25	39.00	47.05	53.05
37	55.40	63.50	69.40

H
4.00
5.80

公差:	版次:	A	上海宗进电子科技有限公司		
	比例:		Shanghai Zong Jin Electron Technology Co.LTD		
. X ±0.35	单位:	mm	型号:	DCH-xxM-XX-X-X	签名
. XX ±0.25	页码:	1/1	描述:	D型连接器	日期
. XXX ±2°	图号:				
LNGLB					